

Pocket Pump TOUCH

ORDERING

Available as Cat. No.

220-1000TC	Pocket Pump TOUCH Pump only
220-1000TC-S	Starter Pump Kit
220-1000TC-K	Single Pump Kit
220-1000TC-K3	3-pack Pump Kit
220-1000TC-K5	5-pack Pump Kit
220-1000TC-K5D	5-pack Deluxe Pump Kit

"Pump only" requires charger that is included in kits. See more at www.skcinc.com/pocket-pump-touch.

All models listed above include Bluetooth (BLE). Non-BLE models are available.

Recommended Flowmeter**

375-00205N	chek-mate with NIST standard traceable calibration certificate
375-00205	chek-mate with UK standard traceable calibration certificate

**Available with ISO standard traceable certificate. Contact SKC for details.

Recommended Accessories

220-200	Quick-connect Bag Sampling Adapter
877-94	DataTrac Pro for Pocket Pump TOUCH USB Bluetooth Adapter (free software download)



MORE INFO

For ordering details and additional accessories, visit www.skcinc.com/pocket-pump-touch

FREE SKC SMARTWAVE APP

Set up flow, operate sample runs, and monitor status for one or more in-range Pocket Pump TOUCH pumps using your iOS and Android phones and tablets.

Browse www.skcinc.com/smartwave or scan the QR code.



MORE INFO




**SCIENCE.
SERVING PEOPLE.**

www.skcinc.com
SKC Inc. 724-941-9701 | SKC-West 714-992-2780 | SKC South 434-352-7149

MP1925 Rev2025.02

Pocket Pump TOUCH

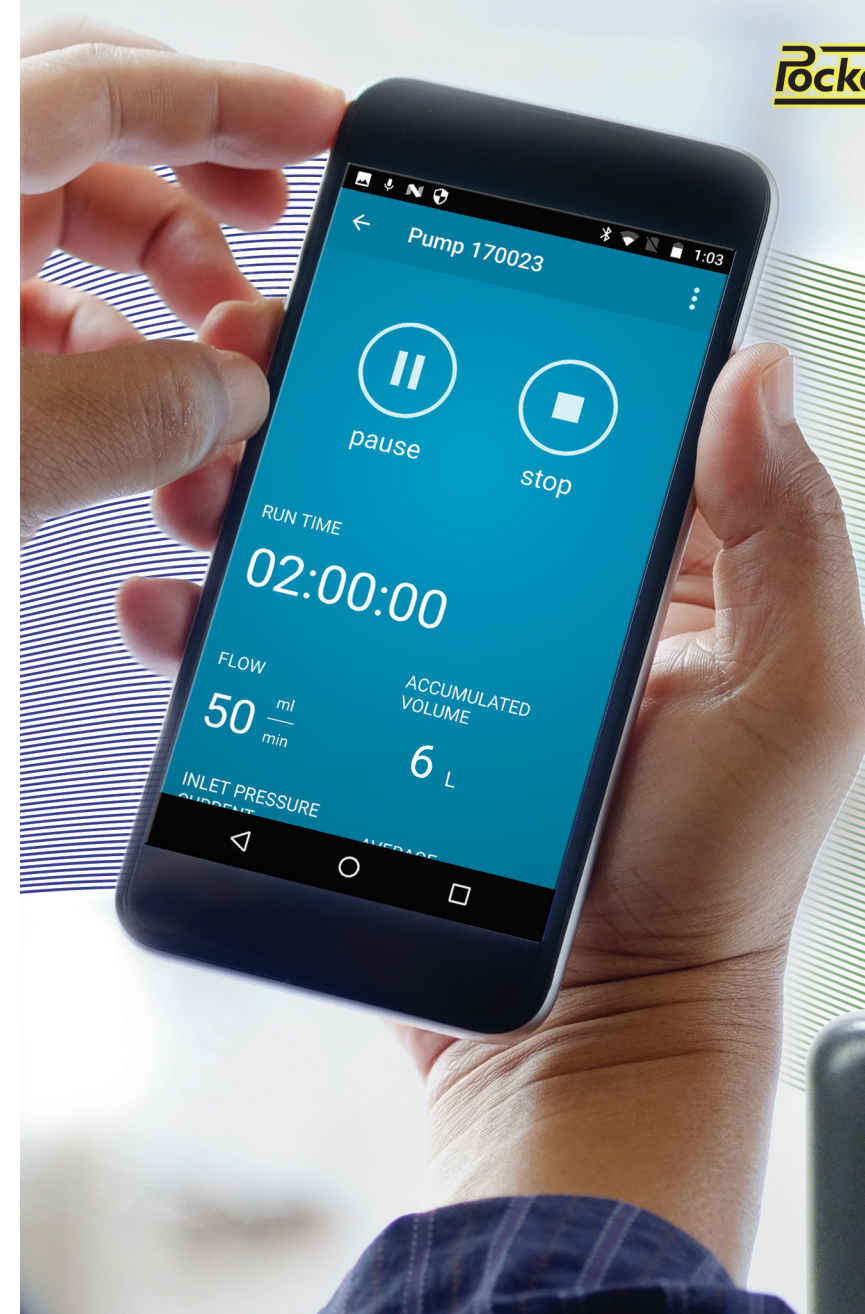

- 20 to 500 ml/min flows
- Small size
- Bluetooth Connectivity
- SmartWave Mobile App



**The Leader in Sampling Solutions and
Expertise for OEHS Professionals**

www.skcinc.com

Rocket Pump® TOUCH

20 to 500 ml/min Sample Pump



Bluetooth communication with PC and DataTrac Pro Software or phones/tablets and SmartWave App for remote pump monitoring



USB charging with magnetic connector and sure-connect LED indicator



Exhaust port with optional quick-connect accessory for secure bag sampling



Easy flow rate verification with Low Flow chek-mate Flowmeter

PERFORMANCE PROFILE

Flow Range in Constant Flow Mode	20 to 500 ml/min
Compensation Range in Constant Flow Mode	20 to 500 ml/min up to 20 inches water back pressure
Pressure Range in Constant Pressure Mode	1 to 20 inches water
Flow Control System	Corrects for changes in back pressure, temperature, and atmospheric pressure
Power	Removable rechargeable Lithium-ion (Li-Ion) battery, 3.7 V, 2.6 Ah, 9.6 Wh or USB charger
Run Time (Li-Ion)	20+ hrs at 500 ml/min up to 20 inches water back pressure*, extended run times available with charger
Accuracy	Constant flow control: $\pm 5\%$ of set-point or ± 3 ml/min, whichever is higher Atmospheric pressure: ± 0.3 in Hg Temperature: ± 1 C Real-time clock: $\pm 1\%$ Constant pressure mode: Reading ± 0.5 inch water
Temperature Ranges	Operating: 32 to 113 F (0 to 45 C); Charging: 32 to 113 F (0 to 45 C); Storage: -4 to 113 (-20 to 45 C)
Humidity Range	$\leq 95\%$ RH, non-condensing
Altitude	Corrects flow for changes in temperature (32 to 113 F [0 to 45 C]) and ambient pressure up to 15,000 feet (4572 meters) above and down to 2300 feet (701 meters) below sea level
Flow Fault	After 3 to 10 seconds of restricted flow, pump stops, elapsed time stops, status LEDs flash red, and pump displays fault icon. After 20 seconds in fault, auto-restart is attempted up to 5 times unless full airflow is restored prior to that. If full airflow is not restored after 5 auto-restart attempts within 5 minutes, the pump ends the run and displays Sample Summary.
Display Type/Parameters	High-contrast backlit LCD/Time, date, battery status, flow rate, sample volume, temperature, atmospheric pressure, back pressure, programmed run remaining time, and elapsed run time
User Interface	Eight-area capacitive touch screen with auto-dim and locking options
Dimensions	3.2 x 3.8 x 1.5 in (8.1 x 9.7 x 3.8 cm)
Weight	8.3 oz (235 gm)
Certifications/Markings	-Intrinsic safety (SKC Cat. No. 220-1000TC operated with SKC Battery Pack Cat. No. P76303) Class I, Groups A, B, C, D; Class II, Groups E, F, G; Class III, T4; Class I, Zone 0, Group IIC T4; Exia -20°C \leq T _a \leq 45°C (Ex) II 1G Exia IIC T4 Ga IECEx UL 16.0113 DEMKO 16ATEX 1600; UL22UKEX2584; UKCA 0843† CE0539 -RoHS compliant
Communications with PC	Low-energy Bluetooth, requires DataTrac Pro for Pocket Pump TOUCH USB Bluetooth Adapter Cat. No. 877-94
Communications with iOS or Android Phones and Tablets	Low-energy Bluetooth, requires SmartWave App - available in the App Store and GooglePlay
Tubing	Requires 1/4-in ID tubing

* Tested using 37-mm, 0.8- μ m MCE filter with new pump and battery. Pump performance may vary.
† UL22UKEX2584 and UKCA mark added based on previously issued ATEX/IECEx certificates

iOS is a trademark of Cisco, registered in the U.S. and other countries.
Android is a trademark of Google LLC

KEY FEATURES

- Intuitive touch screen for easy programmability
- Corrects flow for changes in back pressure, temperature, and atmospheric pressure
- Constant flows from 20 to 500 ml/min
- Bluetooth® low-energy (BLE) communication
 - With PC and DataTrac® Pro Software
 - With iOS® and Android® tablets and phones using the free SKC SmartWave app
 - Non-BLE pump models available (visit www.skccinc.com)
- Large backlit screen
- > 20+ hours run time at 500 ml/min with powerful Li-Ion battery
 - Auto-dim feature conserves battery
 - Extended run times with AC adapter/charger
- Multi-tube Sampling
 - Sample with up to four tubes simultaneously; saves time and uses fewer pumps
 - Constant flow and pressure modes
- Screen lock prevents accidental tap errors
- SecureLock feature provides for passcode-secured sampling
- Designed to meet ISO 13137



SCIENCE. SERVING PEOPLE.®

SKC Inc. 724-941-9701 | SKC-West 714-992-2780 | SKC South 434-352-7149 | www.skccinc.com