


# AirLite Sample Pump

**Economical Abatement Pump!**

**Flows: 5 to 3000 ml/min**



Top view

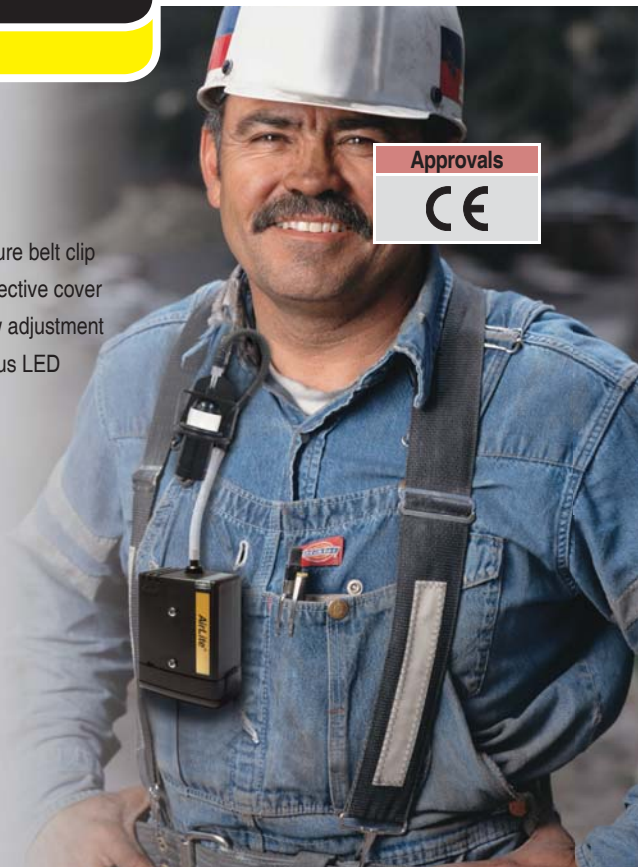

- ⦿ **Patented\*\* flow control system holds constant flow to ± 5% of set-point**
  - 1000 to 3000 ml/min flow range
  - Low flows from 5 to 500 ml/min with low flow adapter kit
- ⦿ **Alkaline battery powered — no charging!**
  - Economical, disposable AA alkaline batteries
  - Ready to go anytime!
- ⦿ **Ideal for abatement, indoor air sampling, and emergency response in non-hazardous locations**
- ⦿ **Minimum of 8 hours run time**
  - Up to 3000 ml/min and 10 inches water back pressure

- ⦿ **Easy operation**
  - Turn it on, calibrate, and sample
  - Easy access battery compartment
- ⦿ **AirLite® fits in the palm of your hand!**
  - Only 12 ounces (340 grams)
  - 4.6 x 3 x 1.75 inches (11.7 x 7.6 x 4.4 cm)
- ⦿ **Features maintain sample integrity**
  - Compensates up to 20 inches water back pressure at 2 L/min
  - Compensates for temperature changes from 41 to 122 F (5 to 50 C)
  - Low battery and flow fault shut-off and indicator
  - Rugged RFI/EMI-shielded case, CE marked

## Ordering Information

Pump and Kits	Cat. No.
<b>AirLite Sample Pump*</b> includes 3 AA alkaline batteries and screwdriver set	<b>110-100*</b>
<b>5-pack Pump Kits</b>	
<b>High Flow Sampling</b> includes 5 AirLite sample pumps as described above and cassette holders, in a Pelican case	<b>110-100K5</b>
<b>High and Low Flow Sampling</b> includes 5 AirLite sample pumps as described above, cassette holders, Constant Pressure Controllers (CPCs), single adjustable low flow holders, and Type A tube covers, in a Pelican case	<b>110-100K5D</b>
<b>Accessories</b>	
<b>Filter Cassette Holder</b> , accommodates two or three-part 25 or 37-mm cassettes with or without a cyclone, clips to a worker's collar	<b>225-1</b>
<b>Low Flow Adapter Kit (5 to 500 ml/min)</b> includes Constant Pressure Controller (CPC), single adjustable low flow holder, and Type A tube cover	<b>110-500</b>
<b>Protective Nylon Pump Pouch</b> , black, with belt loop	<b>224-902</b>

\* Use in non-explosive environments only. Not UL Listed for intrinsic safety  
 \*\* U.S. Patent No. 6,741,056



### SKC Limited Warranty and Return Policy

SKC products are subject to the SKC Limited Warranty and Return Policy, which provides SKC's sole liability and the buyer's exclusive remedy. To view the complete SKC Limited Warranty and Return Policy, go to <http://www.skcinc.com/warranty.asp>.